



# ZK2000-A400-0xxx | Sensor cable, PUR, 12 x 0.14 mm<sup>2</sup>, drag-chain suitable



M12, socket, angled, female, 12-pin, A-coded – open end, 12-wire

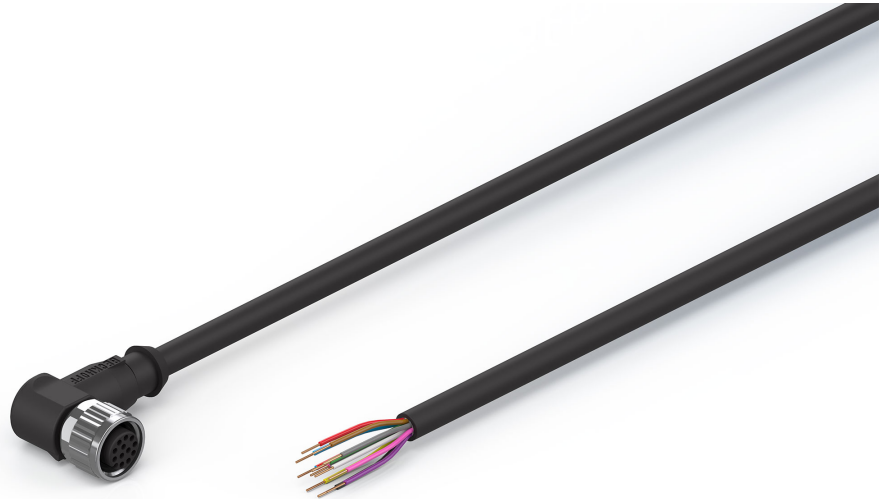

## Plugs

Electrical data	Head A	Head B
Rated voltage	30 V (according to IEC 61076-2-101)	-
Rated current	1.5 A at 40°C	-
Shielding	no	-
Insulation resistance	≥ 100 MΩ (according to IEC 60512)	-
Mechanical data		
Installation size	M12	open end
Connector type	socket	-
Configuration	angled	-
Contact type	female	-
Number of positions (face)	12-pin	12-wire
Coding	A-coded	-
Recommended torque, nut	0.6 Nm	-
Mating cycles	≥ 100 (according to IEC 60512-9a)	-
Way of locking	screw	-

Body color	gray	-
Body material	TPU, UL 94	-
Coupling nut material	GD-Zn, Ni	-
Seal	FPM	-
Contact carrier color	black	-
Contact carrier material	TPU, PA, UL 94	-
Contact material	CuZn, Ni b/Au	-
<b>Environmental data</b>		
RoHS compliant	yes	-
Ambient temperature (operation)	-30...+80 °C, -22...+176 °F	-
Protection rating	IP65/67 in screwed condition (according to IEC 60529)	-
Pollution level	3/2 (according to IEC 60664-1)	-


## Cable

<b>Electrical data</b>		
Rated voltage	300 V	
Insulation resistance	$\geq 1 \text{ G}\Omega \cdot \text{km}$	
Wire resistance (signal/24V)	$\leq 139.0 \text{ }\Omega/\text{km}$	
Test voltage	$\geq 3000 \text{ V}$	
<b>Mechanical data</b>		
Cross-section	12 x 0.14 mm <sup>2</sup> (AWG26)	
Outer cable diameter	6.1 mm $\pm$ 0.2mm (0.240" $\pm$ 0.0079")	
Min. bending radius, moved	10 x outer cable diameter	
Min. bending radius, moved in drag-chain	10 x outer cable diameter	
Min. bending radius, fixed installation	5 x outer cable diameter	
Weight	45 kg/km (30.2 lb/1000 ft)	
Conductor material	copper bare	
Shielding	no	
Use	drag-chain suitable	
UL-Style	AWM STYLE 20549/10152	
Max. acceleration	10 m/s <sup>2</sup>	
Max. speed	3 m/s	
Max. number of cycles	4 million	
Jacket color	black	
Material jacket	PUR (polyurethane)	

Wire color code	brown, blue, white, green, pink, yellow, black, grey, red, violet, grey-pink, red-blue
Wire insulation material	PP (polypropylene)
Printing on the jacket	781-K11120 Li9Y11Y 12x0,14mm <sup>2</sup> E242293 (cULus- Recognized-Symbol) AWM STYLE 20549 80C 300V AWM I A/B 80C 300V FT2
Printing color	white
<b>Environmental data</b>	
Operation temperature range, moved	-25...+80 °C, -13...+176 °F
Operation temperature range, fixed installation	-40...+80 °C, -40...+176 °F
UV resistance	UV resistance of the outer jacket referred to DIN EN ISO 4892-2
Oil resistance	according to DIN EN 60811-404
Flame-retardant	according to UL 758/1581 (cUL-FT2)
Halogen-free	according to IEC 60754 or DIN VDE 0472 part 815
UL	yes, UL E-file number: E242293

**Contact assembly**

1	braun/brown
2	blau/blue
3	weiß/white
4	grün/green
5	rosa/pink
6	gelb/yellow
7	schwarz/black
8	grau/grey
9	rot/red
10	violett/violet
11	grau-rosa/grey-pink
12	rot-blau/red-blue

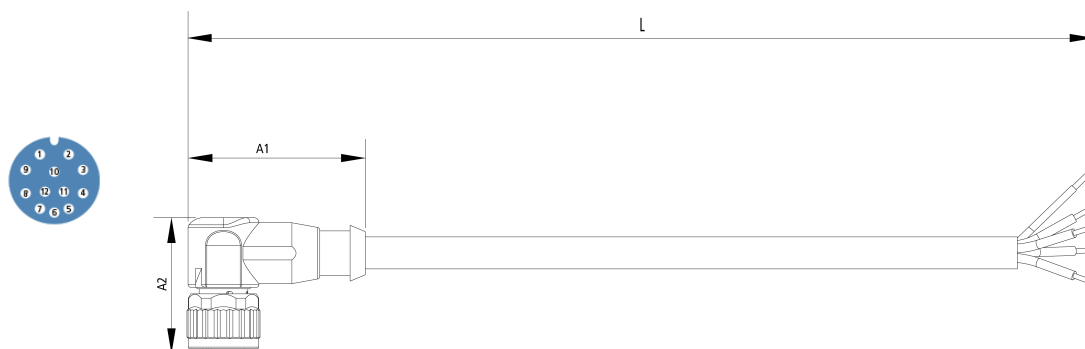**Dimensions**

## Notes

- Depending on the cable length (L), the following length tolerances apply:  
0 m...3.0 m: + 100 mm | 3.0...10.0 m:  $\pm 100$  mm |  $\geq 10.0$  m:  $\pm 2$  %
- Illustrations similar
- Further cable length on request. The last three digits of the ordering information is the cable length in decimeters, e.g. ZKxxxx-xxxx-x020 = cable length 2.00 m

CE, UL	
CE	yes

Ordering information	Length
ZK2000-A400-0200	20.00 m



Products marked with a crossed-out wheeled bin shall not be discarded with the normal waste stream. The device is considered as waste electrical and electronic equipment. The national regulations for the disposal of waste electrical and electronic equipment must be observed.

Beckhoff®, TwinCAT®, TwinCAT/BSD®, TC/BSD®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, Safety over EtherCAT®, TwinSAFE®, XFC®, XTS® and XPlanar® are registered trademarks of and licensed by Beckhoff Automation GmbH. Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.

© Beckhoff Automation GmbH & Co. KG 12/2022

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual application do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.